

## Metallized Polypropylene (PP) - Capacitors for Hybrid Drives

### Special Features

- Very high volume/capacitance ratio
- Self-healing, internal safety disconnecter
- Safe contact configuration by screwable plates
- Dry construction without electrolyte or oil
- Very low dissipation factor
- Negative capacitance change versus temperature
- Very low dielectric absorption
- According to RoHS 2011/65/EU
- Customer-specific capacitances or voltages on request

### Typical Applications

As intermediate circuit capacitor e.g. in hybrid drives

### Construction


#### Dielectric:

Polypropylene (PP) film

#### Capacitor electrodes:

Vacuum-deposited

#### Internal construction:

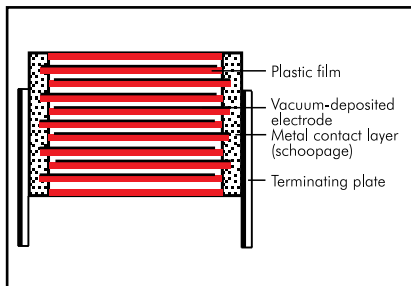

#### Encapsulation:

Solvent-resistant, flame-retardant plastic case with PU seal, UL 94 V-0

#### Terminations:

Tinned plates

#### Marking:

Colour: Black. Marking: Gold.

### Electrical Data

#### Capacitance range:

500  $\mu$ F

#### Rated voltage:

450 VDC

#### Capacitance tolerances:

$\pm 20\%$ ,  $\pm 10\%$ , ( $\pm 5\%$  available subject to special enquiry)

#### Operating temperature range:

$-55^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  (hot spot  $\leq +110^{\circ}\text{C}$  in combination with a heatsink)

#### Insulation resistance at $+20^{\circ}\text{C}$ :

$\geq 10\,000\text{ sec (M}\Omega \times \mu\text{F)}$

(mean value: 50 000 s)

Measuring voltage: 100 V/1 min.

#### Dielectric loss factor $\tan \delta_0$ : $2 \times 10^{-4}$

Test voltage:  $1.3 U_r$ , 2sec

Dielectric absorption: 0.05 %

#### Voltage derating:

A voltage derating factor of 1.35 % per K must be applied from  $+85^{\circ}\text{C}$  for DC voltage.

#### Reliability:

Operational life > 100 000 hours at  $40^{\circ}\text{C}$

Failure rate < 36 fit ( $0.75 \times U_r$  and  $40^{\circ}\text{C}$ )


### Mounting Recommendation

Excessive mechanical strain, e.g. pressure or shock onto the capacitor body, is to be avoided during mounting and usage of the capacitors. When fixing the capacitor the screw torque is to be limited to max. 5 Nm.

### Packing

Transport-safe packing in cardboard boxes.

For further details and graphs please refer to Technical Information.

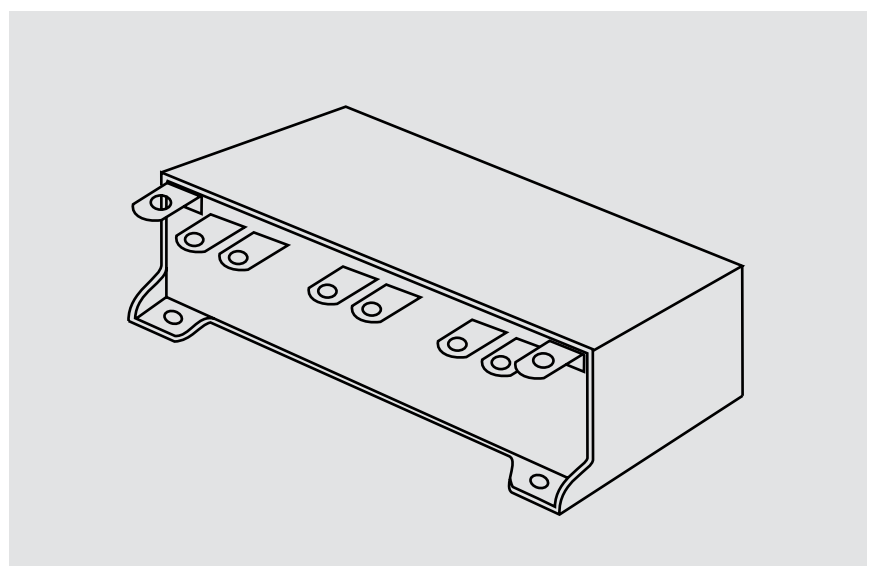

Continuation

General Data

Capacitance	$U_R$	$I_{max}$ A	$I_{rms}^*$ A	$L_e$ nH	ESR* mΩ	Approx. weight g	Part number
500 μF	450 VDC	5000	120**	< 15	0.8**	1400	DCHYH06500JG00_ _ _ _

\* f = 1 kHz

\*\* General guide

Customized solutions can be realized on request

Part number completion:	
Tolerance:	20 % = M
	10 % = K
	5 % = J
Packing:	bulk = S
Pin length:	none = 00

Top view dimensions: 237 ± 1 (total length), 12 (terminal width), 9 (terminal spacing), 31.15 (terminal offset), 98.25 (terminal offset), 165.35 (terminal offset), 42 ± 1 (terminal offset), 50 ± 1 (height), 51.5 ± 1 (height), 1 (terminal thickness).

Side view dimensions: 72 ± 1 (height), 16 (terminal width), M6 (terminal thread), 7 (terminal thickness), 14 (terminal offset), 6 (terminal offset), 21 (terminal offset), 37.15 (terminal offset), 104.25 (terminal offset), 171.35 (terminal offset), 21 (terminal offset), 15 ± 1 (terminal offset), 6 (terminal offset), Ø 6.5 (terminal hole), Ø 5 (terminal hole), 15 (terminal offset), 7 (terminal offset).

Dims. in mm.

Rights reserved to amend design data without prior notification.

# WIMA Customized Capacitors for Intermediate Circuit Applikations



**WIMA DC-LINK HC**

**WIMA DC-LINK HY**

Size  
Capacitance  
Voltage  
Connection  
Casing

# WIMA Part Number System

A WIMA part number consists of 18 digits and is composed as follows:

- Field 1 - 4: Type description
- Field 5 - 6: Rated voltage
- Field 7 - 10: Capacitance
- Field 11 - 12: Size and PCM
- Field 13 - 14: Version code (e.g. Snubber versions)
- Field 15: Capacitance tolerance
- Field 16: Packing
- Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18				
M	K	S	2	C	0	2	1	0	0	1	A	0	0	M	S	S	D				
MKS 2				63 VDC		0.01 μF				2.5×6.5×7.2		-		20%	bulk	6 -2					
<b>Type description:</b> SMD-PET = SMDT SMD-PEN = SMDN SMD-PPS = SMDI FKP 02 = FKPO MKS 02 = MKS0 FKS 2 = FKS2 FKP 2 = FKP2 MKS 2 = MKS2 MKP 2 = MKP2 FKS 3 = FKS3 FKP 3 = FKP3 MKS 4 = MKS4 MKP 4 = MKP4 MKP 10 = MKP1 FKP 4 = FKP4 FKP 1 = FKP1 MKP-X2 = MKX2 MKP-X2 R = MKXR MKP-X1 R = MKX1 MKP-Y2 = MKY2 MP 3-X2 = MPX2 MP 3-X1 = MPX1 MP 3-Y2 = MPY2 MP 3R-Y2 = MPRY Snubber MKP = SNMP Snubber FKP = SNFP GTO MKP = GTOM DC-LINK MKP 3 = DCP3 DC-LINK MKP 4 = DCP4 DC-LINK MKP 4S = DCP5 DC-LINK MKP 5 = DCP5 DC-LINK MKP 6 = DCP6 DC-LINK HC = DCHC				<b>Rated voltage:</b> 50 VDC = B0 63 VDC = C0 100 VDC = D0 250 VDC = F0 400 VDC = G0 450 VDC = H0 600 VDC = I0 630 VDC = J0 700 VDC = K0 800 VDC = L0 850 VDC = M0 900 VDC = N0 1000 VDC = O1 1100 VDC = P0 1200 VDC = Q0 1250 VDC = R0 1500 VDC = S0 1600 VDC = T0 2000 VDC = U0 2500 VDC = V0 3000 VDC = W0 4000 VDC = X0 6000 VDC = Y0 250 VAC = 0W 275 VAC = 1W 300 VAC = 2W 305 VAC = AW 400 VAC = 3W 440 VAC = 4W 500 VAC = 5W ...		<b>Capacitance:</b> 22 pF = 0022 47 pF = 0047 100 pF = 0100 150 pF = 0150 220 pF = 0220 330 pF = 0330 470 pF = 0470 680 pF = 0680 1000 pF = 1100 1500 pF = 1150 2200 pF = 1220 3300 pF = 1330 4700 pF = 1470 6800 pF = 1680 0.01 μF = 2100 0.022 μF = 2220 0.047 μF = 2470 0.1 μF = 3100 0.22 μF = 3220 0.47 μF = 3470 1 μF = 4100 2.2 μF = 4220 4.7 μF = 4470 10 μF = 5100 22 μF = 5220 47 μF = 5470 100 μF = 6100 220 μF = 6220 1000 μF = 7100 1500 μF = 7150 ...				<b>Size:</b> 4.8×3.3×3 Size 1812 = KA 4.8×3.3×4 Size 1812 = KB 5.7×5.1×3.5 Size 2220 = QA 5.7×5.1×4.5 Size 2220 = QB 7.2×6.1×3 Size 2824 = TA 7.2×6.1×5 Size 2824 = TB 10.2×7.6×5 Size 4030 = VA 12.7×10.2×6 Size 5040 = XA 15.3×13.7×7 Size 6054 = YA 2.5×7×4.6 PCM 2.5 = 0B 3×7.5×4.6 PCM 2.5 = 0C 2.5×6.5×7.2 PCM 5 = 1A 3×7.5×7.2 PCM 5 = 1B 2.5×7×10 PCM 7.5 = 2A 3×8.5×10 PCM 7.5 = 2B 3×9×13 PCM 10 = 3A 4×9×13 PCM 10 = 3C 5×11×18 PCM 15 = 4B 6×12.5×18 PCM 15 = 4C 5×14×26.5 PCM 22.5 = 5A 6×15×26.5 PCM 22.5 = 5B 9×19×31.5 PCM 27.5 = 6A 11×21×31.5 PCM 27.5 = 6B 9×19×41.5 PCM 37.5 = 7A 11×22×41.5 PCM 37.5 = 7B 19×31×56 PCM 48.5 = 8D 35×50×57 PCM 52.5 = 9F ...				<b>Tolerance:</b> ±20% = M ±10% = K ±5% = J ±2.5% = H ±1% = E ...				<b>Packing:</b> AMMO H16.5 340×340 = A AMMO H16.5 490×370 = B AMMO H18.5 340×340 = C AMMO H18.5 490×370 = D REEL H16.5 360 = F REEL H16.5 500 = H REEL H18.5 360 = I REEL H18.5 500 = J ROLL H16.5 = N ROLL H18.5 = O BLISTER W12 180 = P BLISTER W12 330 = Q BLISTER W16 330 = R BLISTER W24 330 = T Bulk/TPS Standard = S ...			